


# The BT Series

## Benefits

- Euro-Probe sampling valve uses M16x2 probes
- Easily bend tube to capture active oil in reservoirs and gearboxes
- Swivel option available for bent tubes in confined locations
- **Sampling range 0 - 500 psi (0 - 3.45 MPa)**

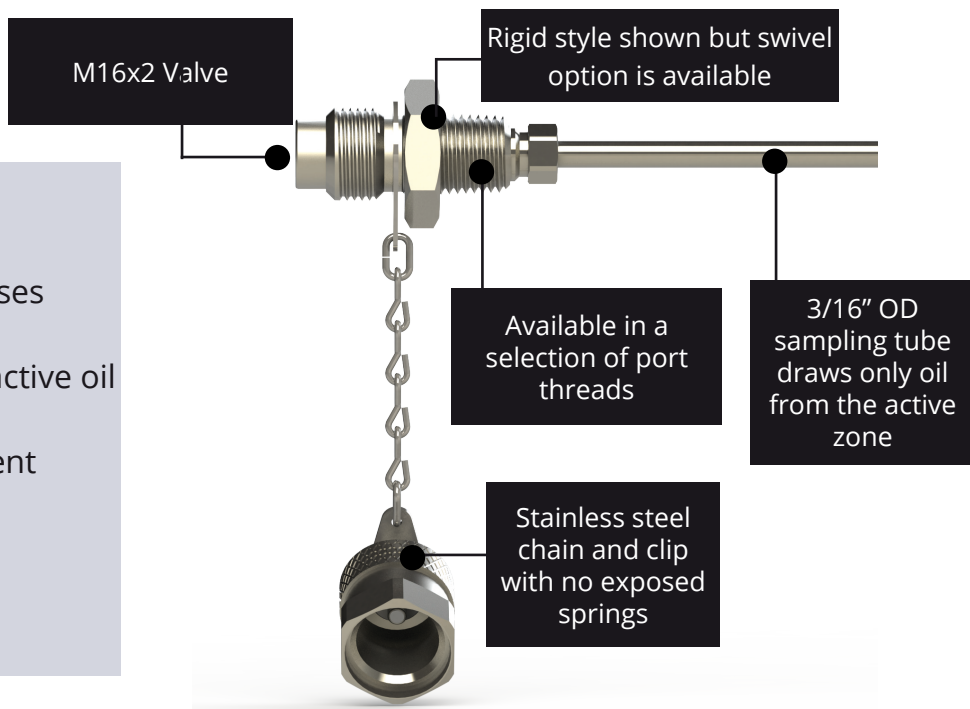

**For a higher sampling flow consider the LT or LTJ Sampling Tubes**

## Required for Sampling:

Part	Use	Reusable?
SBF4	Sampling probe for pressures below 250 psi	Yes
VHBF	Sampling probe for pressures above 250 psi	Yes
SER4	Plastic tubing	No
VAC	Vacuum pump	Yes

Part Number	Port Thread Size and Type	Valve Sealing	Valve Material	Tube Size	Tube Material	Swivel	Tube Length
B14NTR12	1/4"-18 NPTF	Viton	Carbon Steel	3/16" OD	Stainless Steel	No	12"
B14NTRS12	1/4"-18 NPTF	Viton	Carbon Steel	3/16" OD	Stainless Steel	Yes	12"
B14NRTR12	1/4"-18 NPTF	Viton	Stainless Steel	3/16" OD	Stainless Steel	No	12"
B14NRTRS12	1/4"-18 NPTF	Viton	Stainless Steel	3/16" OD	Stainless Steel	Yes	12"

**Note:** other thread sizes available, different tube lengths also available  
Valve Material Options: Carbon Steel, 316 Stainless Steel

Gearboxes | Reservoirs

